




IMPORTANT SAFETY NOTES




ALWAYS READ THE INSTRUCTIONS BEFORE USING PODIUM




NEVER USE A PODIUM WITH DAMAGED OR MISSING COMPONENTS




NEVER OVERREACH




NEVER HAVE MORE THAN ONE PERSON ON THE PLATFORM




NEVER USE ON UNEVEN OR SLOPING SURFACES




DO NOT MOVE PODIUM IF A PERSON IS STILL ON IT



NEVER USE BOXES FOR EXTRA HEIGHT, STAND ONLY ON THE PLATFORM




NEVER USE PODIUMS AS A MEANS OF ACCESS TO ANOTHER PLACE.



NEVER USE PODIUMS NEAR ELECTRICAL POWER LINES

BE AWARE OF THE FOLLOWING:-

- A. DO NOT USE ON LOOSE OR SLIPPERY SURFACES.
- B. NEVER STAND ON THE ACCESS LADDER TO WORK.
- C. WORKING PLATFORM MUST BE LEVEL.
- D. INSPECT BEFORE USE.
- E. ONLY ASCEND OR DESCEND THE LLWP USING THE ACCESS PROVIDED.
- F. FACE THE FOLDING BACK SECTION WHEN ASCENDING OR DESCENDING.
- G. ENSURE THE GATE IS CLOSED AND LOCKED BEFORE USE.
- H. BEWARE OF FINGER TRAPS.
- J. TO MOVE UNIT UNLOCK GATE AND DISMOUNT, UNLOCK CASTORS AND RE-LOCATE.
- K. IF IN DOUBT DO NOT GUESS CONSULT YOUR SUPPLIER.
- L. SEE OVERLEAF FOR COMPONENT CHECKLIST



ALWAYS LOCK ALL CASTORS WHEN PODIUM IS SITED, AND BEFORE USE.

1000 AND PAS 250 1000 PODIUM UNIT ASSEMBLY GUIDE



Dimensions — Platform at 1M x Width — 0.65M x Depth 1.3M
 Working Height — 3M (Max)
 Dimensions — Folded Height — 2.05M x Width - 0.25M x Depth - 1.3M
 Weight — 31Kg Safe Working Load - 150kg
 PAS 250 — 35Kg (Mini Stabilisers)
 Manufactured under an ISO9001:2008 Quality System
 Complies fully with the Working at Height Regulations 2005 and PAS250 Specifications
 Lightweight all Aluminium Construction

For further information or assistance, please contact
 Interlink Alloy Systems Limited — Tel 01992 716509
 Or visit: www.interlinkalloy.co.uk

1000 AND PAS 1000 750 PODIUM UNIT ASSEMBLY GUIDE



1 X FOLDING FRAME
1 X PLATFORM
1 X LADDER
2 X STABILISER (FOR
PAS 250 COMPLIANCE)



2) OPEN FRAME AND LOCK
MECHANISM



3) FIT PLATFORM AT
CORRECT HEIGHT



4) CLIP UPPER BRACE OF
LADDER ABOVE RINGS ON
VERTICALS WITH ASSEMBLED
HOOKS AT TOP




5) POSITION UNIT AND
LOCK CASTORS



6) FIT STABILISERS TO
BACK VERTICALS (FOR
PAS 250 COMPLIANCE)



7) USE LADDER TO
ACCESS PLATFORM

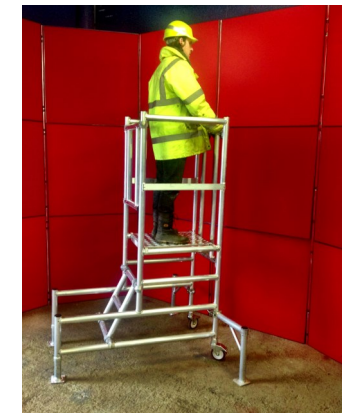

8) CLOSE AND
LOCK GATE